

1 3"



: 96510200

Q_OpFluidTemp: : 35 °C
 : 0,15 m/sec: 35 °C
 : 20 °C
 : 998.2 kg/m³

: 10700 rpm
 : 2 m³/h
 : 71 m
 : CE,UL,CUL
 : ISO9906:2012 3B

DIN W.-Nr. 1.4301
 AISI 304

DIN W.-Nr. 1.4301
 AISI 304



Rp 1 1/4
 : 76 mm

MS3
 - 1: 1.65 kW
 - 2: 1.15 kW




50 Hz
 : 1 x 200-240 V

: 8.4 A
: 1,00
: 10700 rpm
:
(IEC 34-5): IP68
(IEC 85): F
: 1.5 m
:
: 5.4 kg
: 6.1 kg
: 0.009 m3

96510200 SQ 2-70 50 Hz

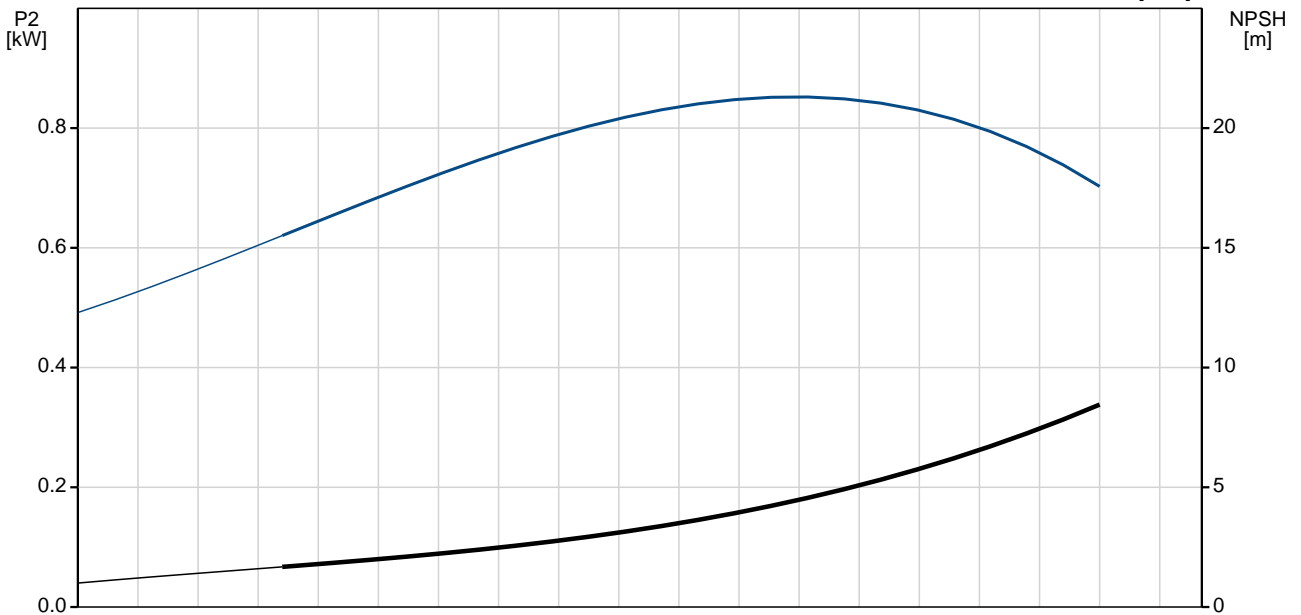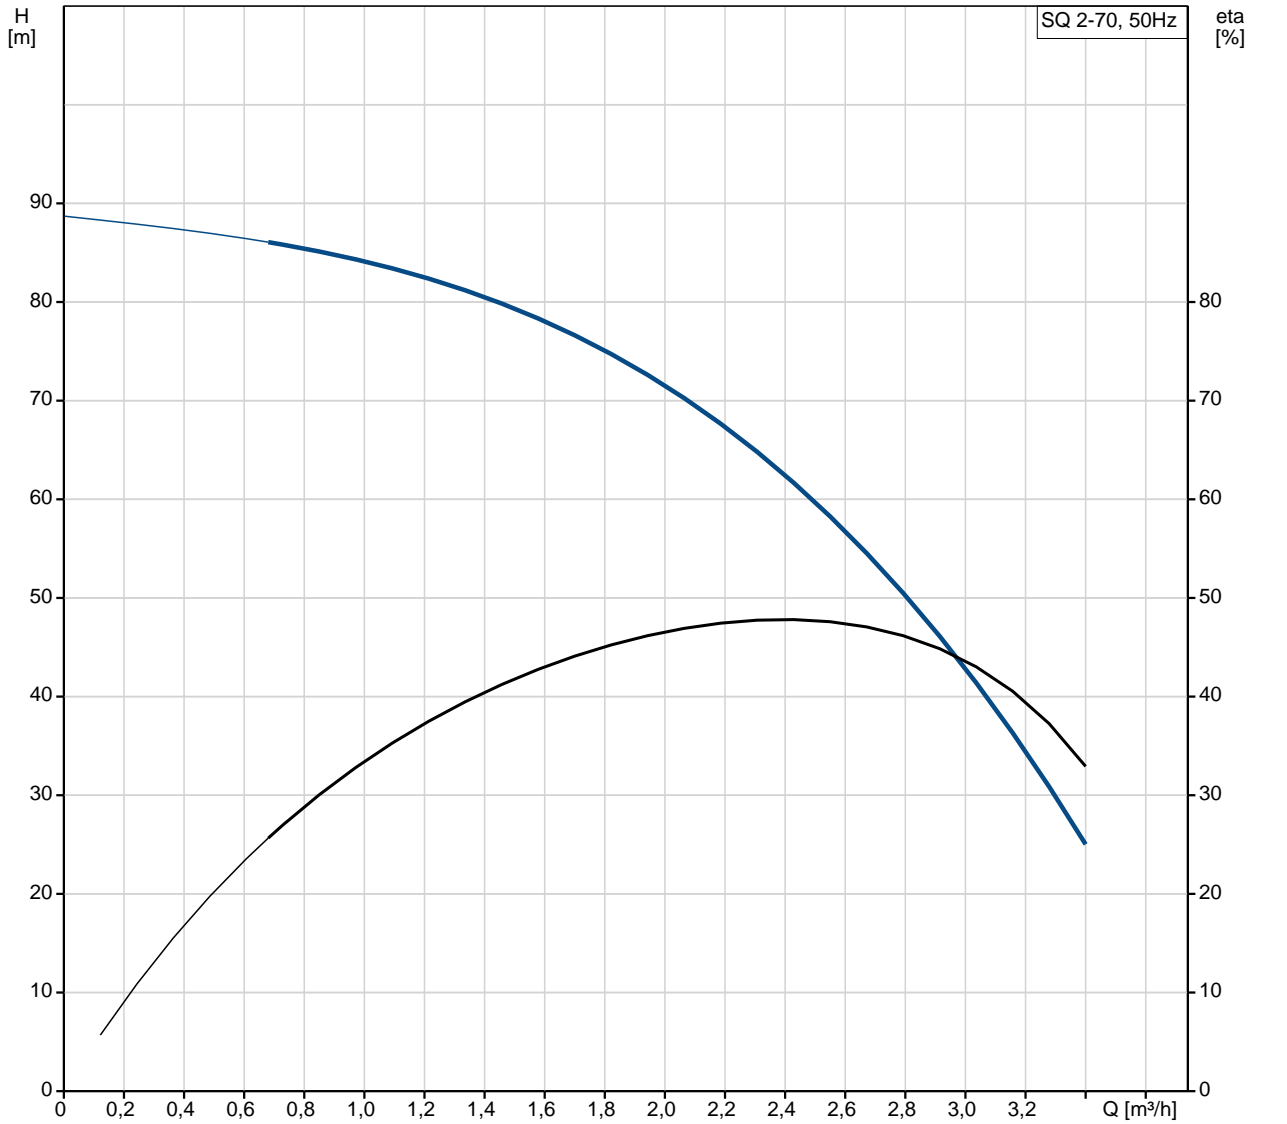


No.:		SQ 2-70
EAN		96510200
		5700396504223
		10700 rpm
		2 m³/h
		71 m
		CE,UL,CUL
		ISO9906:2012 3B
		96080394
		4
		B
		DIN W.-Nr. 1.4301
		AISI 304
		DIN W.-Nr. 1.4301
		AISI 304
		Rp 1 1/4
		76 mm
		35 °C
m/sec:		0,15 35 °C
Q_OpFluidTemp:		20 °C
		998.2 kg/m³
		MS3
- 1:		1.65 kW
- 2:		1.15 kW
		50 Hz
		1 x 200-240 V
		8.4 A
		1,00
		10700 rpm
(IEC 34-5):		IP68
(IEC 85):		F
		Y
		1.5 m
No:		96160851

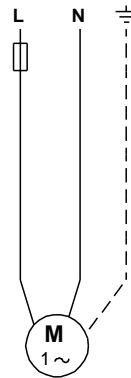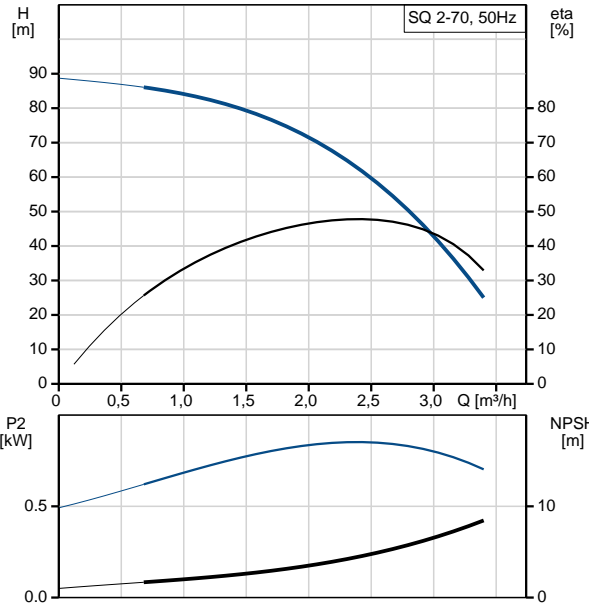

CU 300/CU 301:

96510200 SQ 2-70 50 Hz

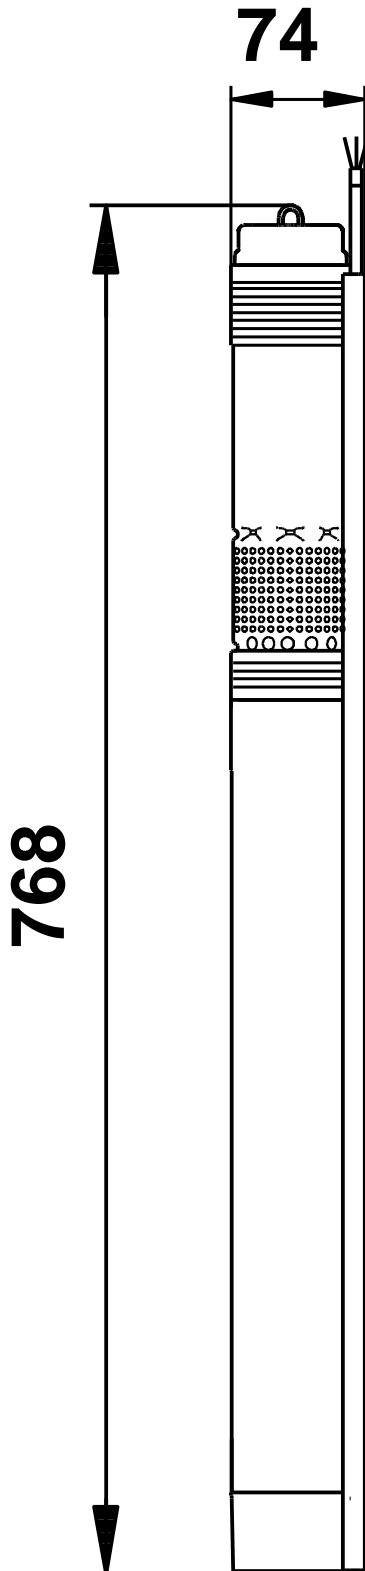

! [mm],