

1

3"



: 96510204

: 308 K
 0,15 m/sec: 308 K
 Liquid temperature during operation: 293 K
 : 998.2 kg/m³

: 10700 rpm
 : 3 m³/h
 : 26 m
 : CE,UL,CUL
 : ISO9906:2012 3B

/
 DIN W.-Nr. 1.4301
 AISI 304

DIN W.-Nr. 1.4301
 AISI 304



Rp 1 1/4
 : 76 mm

: MS3
 - 1: 1.02 kW
 - 2: 0.7 kW




: 50 Hz
 : 1 x 200-240 V
 : 5.2 A
 : 1,00
 : 10700 rpm

(IEC 34-5): IP68
 (IEC 85): F
 : 1.5 m


96510204 SQ 3-30 50 Hz

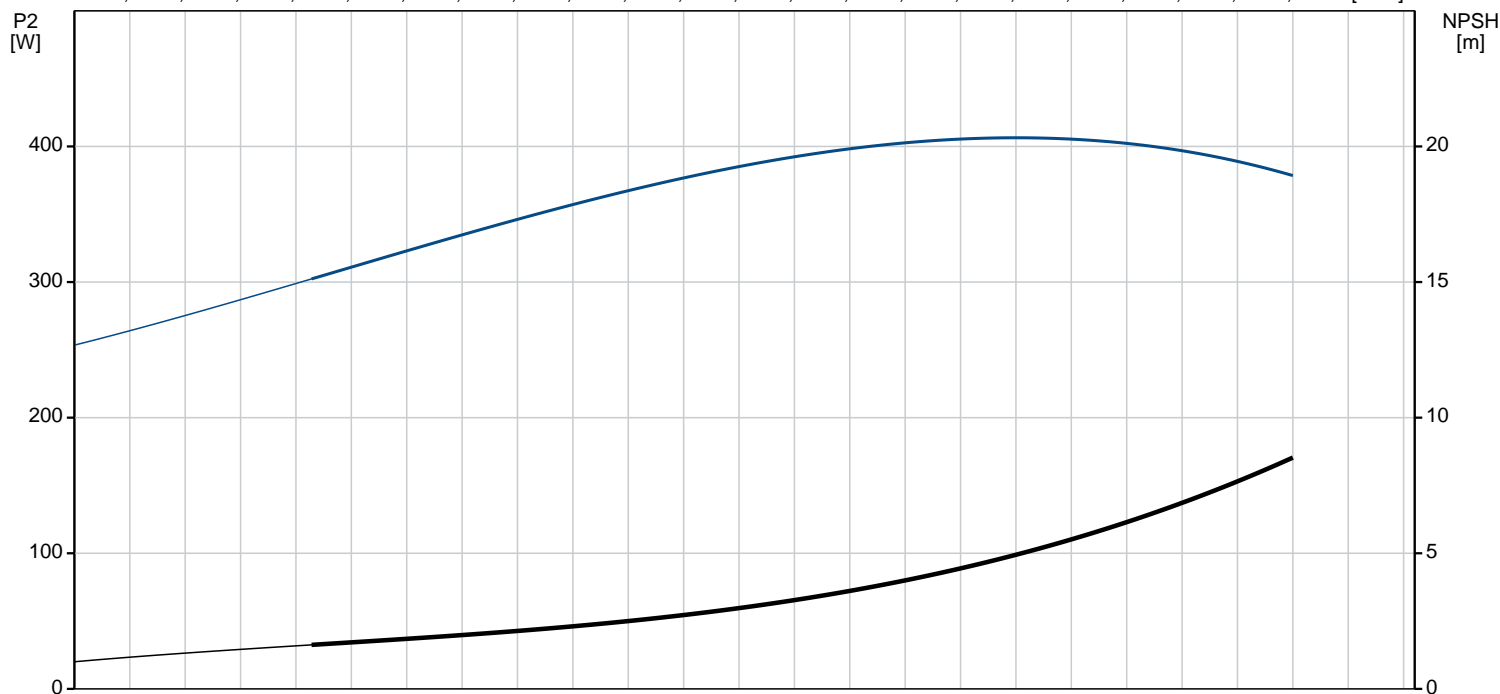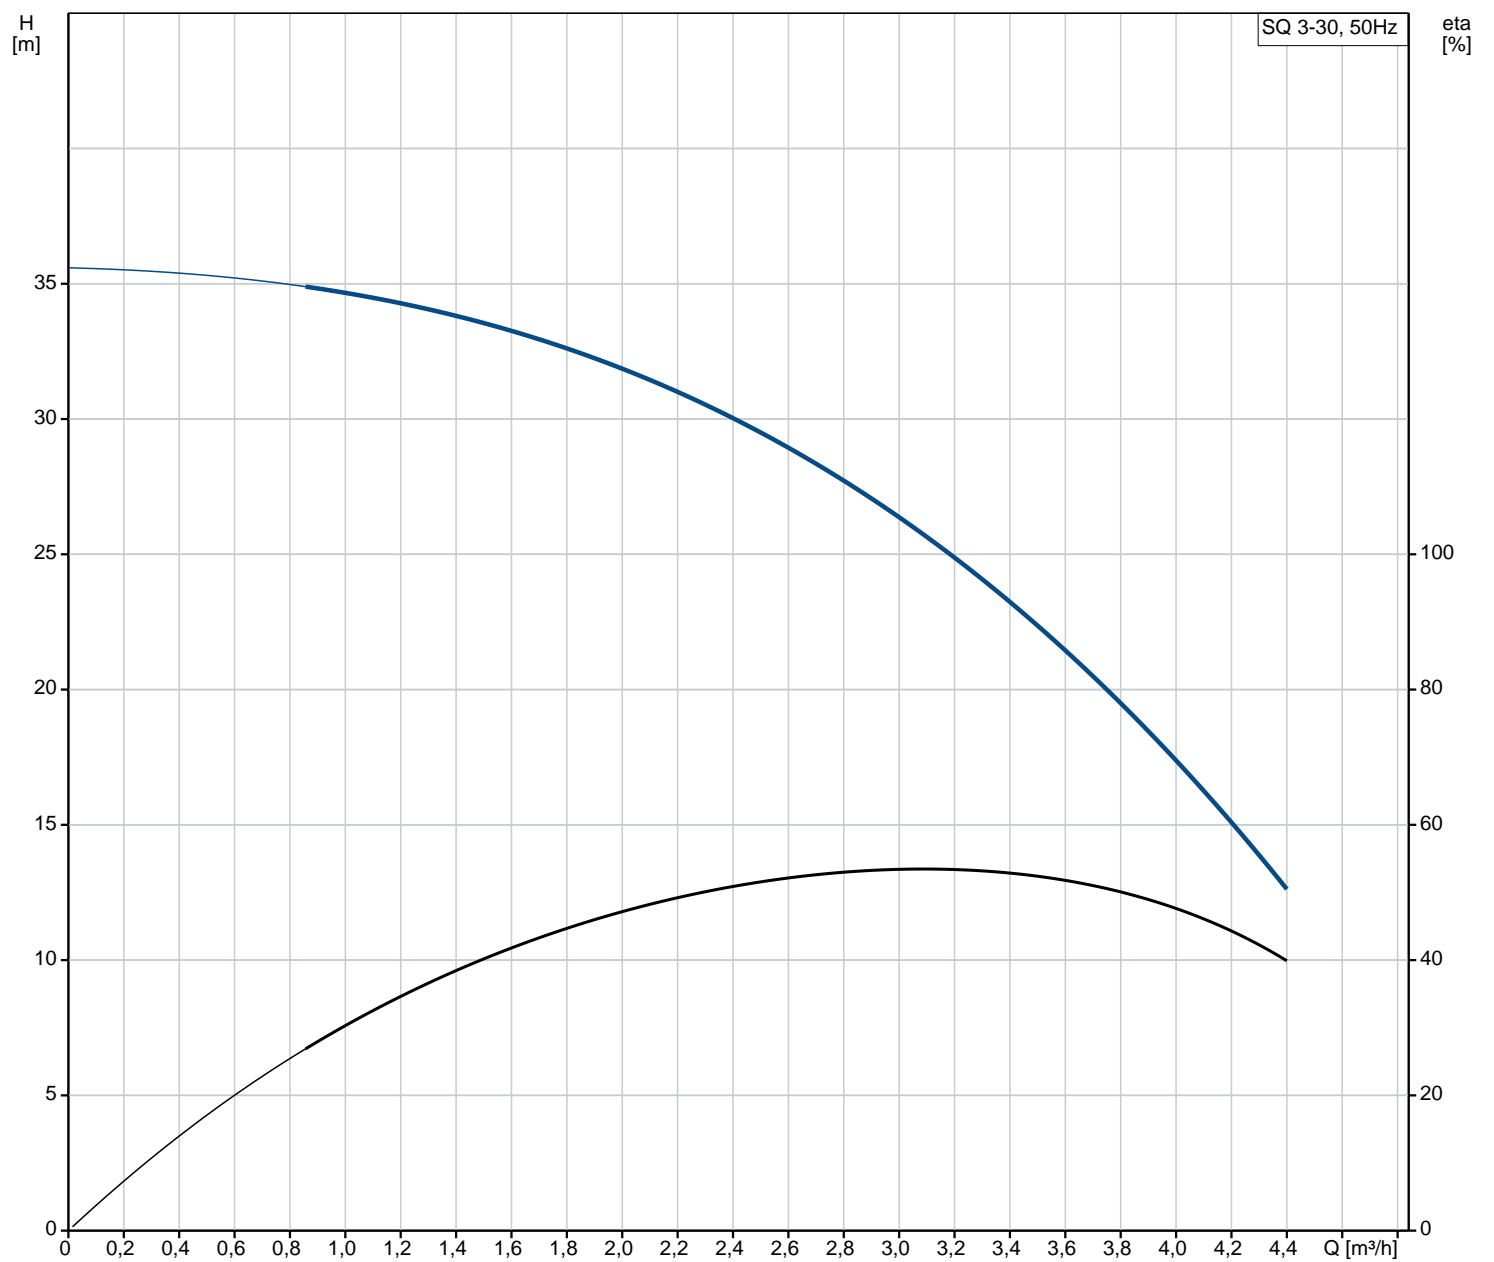

No.:	SQ 3-30
EAN	96510204
	5700396504261
	10700 rpm
	3 m³/h
	26 m
	CE,UL,CUL
	ISO9906:2012 3B
	96080386
	2
	B
	DIN W.-Nr. 1.4301
	AISI 304
	DIN W.-Nr. 1.4301
	AISI 304
	Rp 1 1/4
	76 mm
	308 K
	308 K
0,15 m/sec:	308 K
Liquid temperature during operation:	293 K
	998.2 kg/m³
	MS3
- 1:	1.02 kW
- 2:	0.7 kW
	50 Hz
	1 x 200-240 V
	5.2 A
	1,00
	10700 rpm
(IEC 34-5):	IP68
(IEC 85):	F
	Y
	1.5 m
No:	96160850
CU 300/CU 301:	
	4.8 kg
	5.4 kg
	0.009 m³
	EU/S-AMREG/APREG

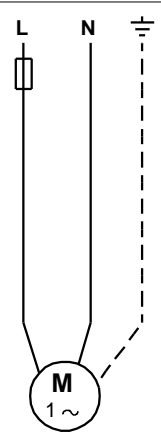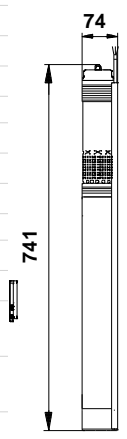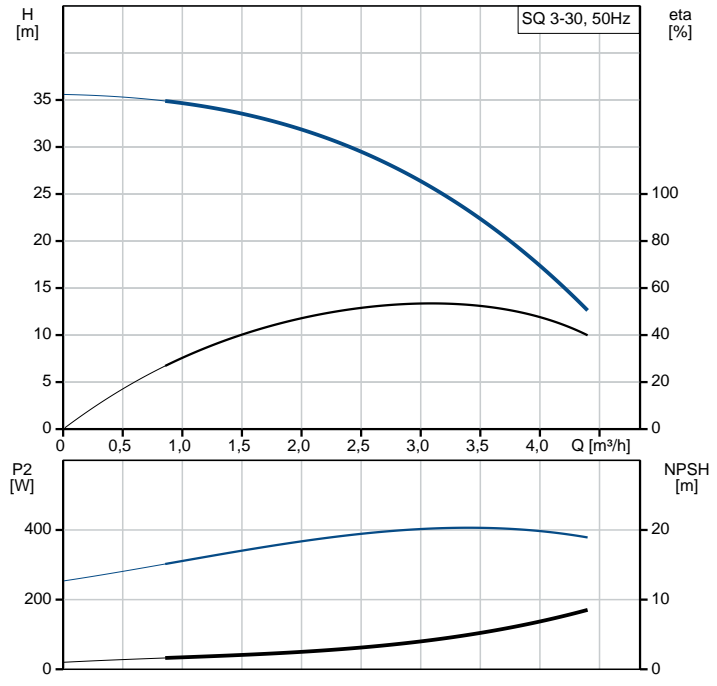

96510204 SQ 3-30 50 Hz

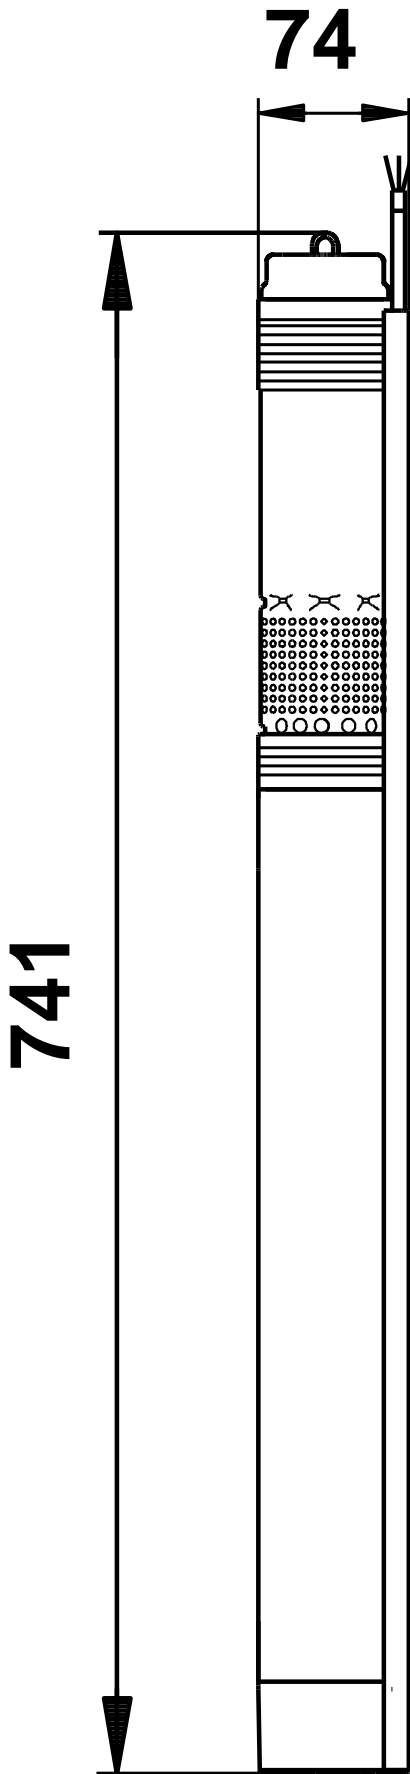

96510204 SQ 3-30 50 Hz

